

**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****General Description**

The AP4300 is a monolithic IC specifically designed to regulate the output current and voltage levels of switching battery chargers and power supplies.

The device contains two operational amplifiers and a precision shunt regulator. Op Amp 1 is designed for voltage control, whose non-inverting input internally connects to the output of the shunt regulator. Op Amp 2 is for current control with both inputs uncommitted. The IC offers the power converter designer a control solution that features increased precision with a corresponding reduction in system complexity and cost.

The AP4300 is available in standard packages of DIP-8 and SOIC-8.

Features**Op Amp**

- Input Offset Voltage: 0.5mV
- Supply Current: 250 μ A per Op Amp at 5.0V Supply Voltage
- Unity Gain Bandwidth: 1MHz
- Output Voltage Swing: 0 to ($V_{CC}-1.5$) V
- Power Supply Range: 3 to 18V

Voltage Reference

- Fixed Output Voltage Reference: 2.5V, 2.6V
- Voltage Tolerance: 0.5%, 1%
- Sink Current Capability from 0.1 to 80mA

Applications

- Battery Charger
- Switching Power Supply

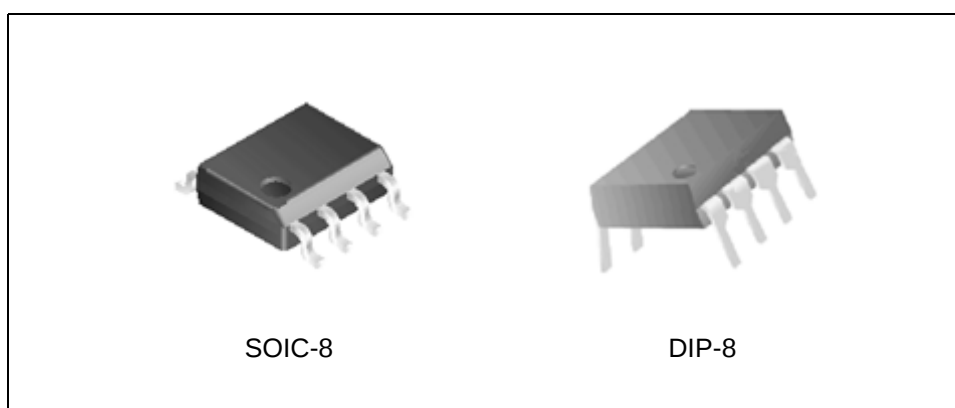


Figure 1. Package Types of AP4300

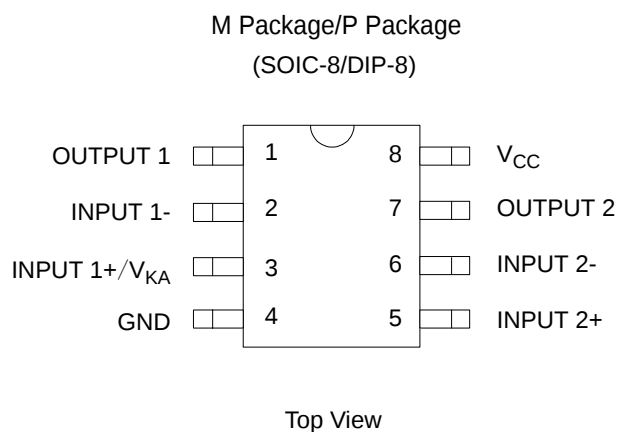
**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****Pin Configuration**

Figure 2. Pin Configuration of AP4300

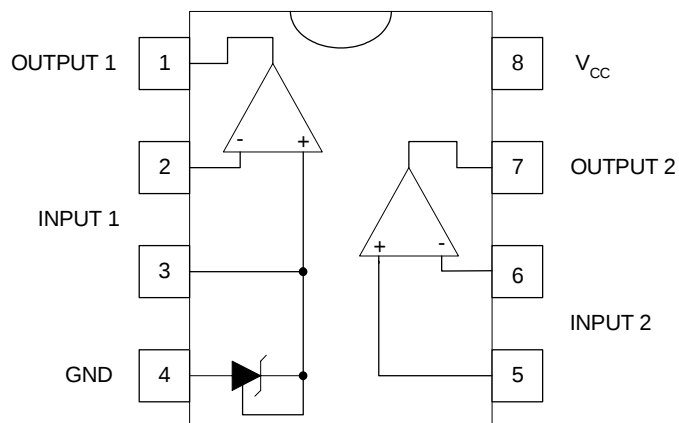
Functional Block Diagram

Figure 3. Functional Block Diagram of AP4300

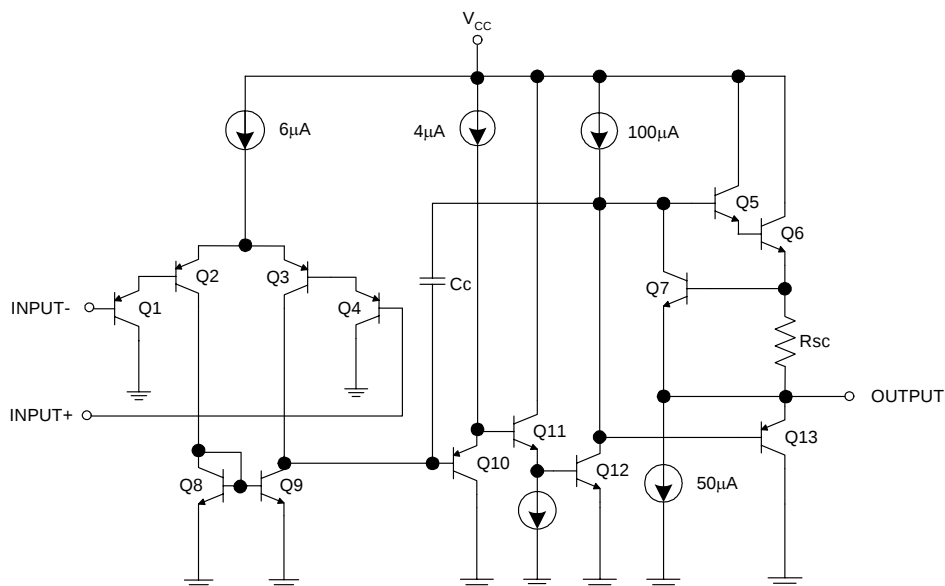
**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****Functional Block Diagram (Continued)**

Figure 4. Op Amp Functional Block Diagram
(Each Amplifier)

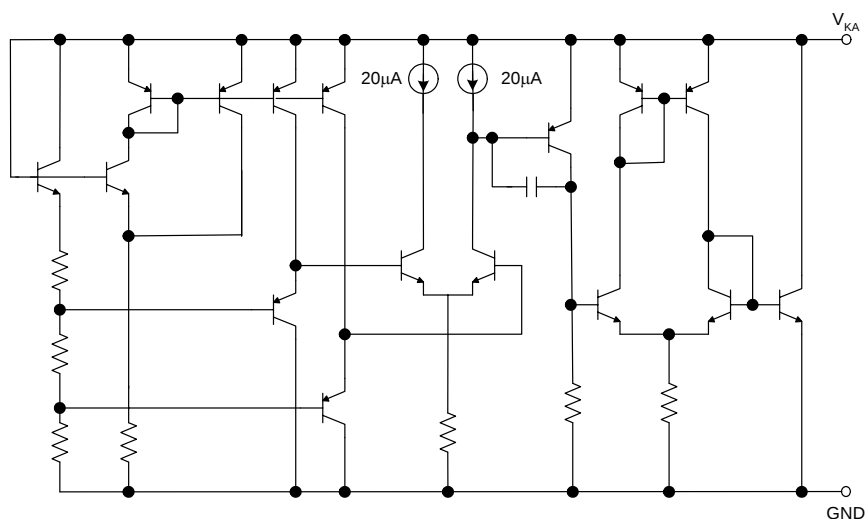
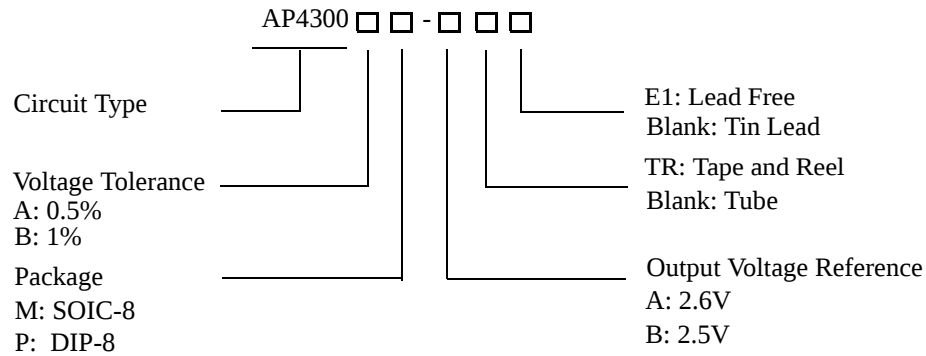


Figure 5. Voltage Reference Functional Block Diagram

**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****Ordering Information**

Package	Reference Voltage	Voltage Tolerance	Temperature Range	Part Number		Marking ID		Packing Type
				Tin Lead	Lead Free	Tin Lead	Lead Free	
DIP-8	2.6V	0.5%	-40 to 105°C	AP4300AP-A	AP4300AP-AE1	AP4300AP-A	AP4300AP-AE1	Tube
		1%		AP4300BP-A	AP4300BP-AE1	AP4300BP-A	AP4300BP-AE1	
	2.5V	0.5%		AP4300AP-B	AP4300AP-BE1	AP4300AP-B	AP4300AP-BE1	
		1%		AP4300BP-B	AP4300BP-BE1	AP4300BP-B	AP4300BP-BE1	
SOIC-8	2.6V	0.5%	-40 to 105°C	AP4300AM-A	AP4300AM-AE1	AP4300AM-A	AP4300AM-AE1	Tube
				AP4300AM-ATR	AP4300AM-ATRE1	AP4300AM-A	AP4300AM-AE1	Tape & Reel
		1%		AP4300BM-A	AP4300BM-AE1	AP4300BM-A	AP4300BM-AE1	Tube
				AP4300BM-ATR	AP4300BM-ATRE1	AP4300BM-A	AP4300BM-AE1	Tape & Reel
	2.5V	0.5%		AP4300AM-B	AP4300AM-BE1	AP4300AM-B	AP4300AM-BE1	Tube
				AP4300AM-BTR	AP4300AM-BTRE1	AP4300AM-B	AP4300AM-BE1	Tape & Reel
		1%		AP4300BM-B	AP4300BM-BE1	AP4300BM-B	AP4300BM-BE1	Tube
				AP4300BM-BTR	AP4300BM-BTRE1	AP4300BM-B	AP4300BM-BE1	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant.

**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****Absolute Maximum Ratings (Note 1)**

Parameter	Symbol	Value		Unit
Power Supply Voltage (V_{CC} to GND)	V_{CC}	20		V
Op Amp 1 and 2 Input Voltage Range (Pins 2, 5, 6)	V_{IN}	-0.3 to $V_{CC}+0.3$		V
Op Amp 2 Input Differential Voltage (Pins 5, 6)	V_{ID}	20		V
Voltage Reference Cathode Current (Pin 3)	I_K	100		mA
Power Dissipation ($T_A=25^{\circ}\text{C}$)	P_D	DIP-8	800	mW
		SOIC-8	500	
Operating Junction Temperature	T_J	150		$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to 150		$^{\circ}\text{C}$
Lead Temperature (Soldering 10s)	T_L	260		$^{\circ}\text{C}$

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Min	Max	Unit
Supply Voltage	3	18	V
Ambient Temperature	-40	105	$^{\circ}\text{C}$



DUAL OP AMP AND VOLTAGE REFERENCE

AP4300

Electrical Characteristics

Operating Conditions: $V_{CC}=+5V$, $T_A=25^{\circ}C$ unless otherwise specified.

Parameter		Conditions		Min	Typ	Max	Unit
Total Supply Current, Excluding Current in Voltage Reference		V _{CC} =5V, no load, -40°C ≤T _A ≤105°C			0.5	0.8	mA
		V _{CC} =18V, no load, -40°C ≤T _A ≤105°C			0.6	1.2	
Voltage Reference Section							
Reference Voltage for AP4300-A		I _K =10mA, T _A =25°C	0.5% tolerance	2.587	2.600	2.613	V
			1% tolerance	2.574		2.626	
Reference Voltage for AP4300-B		I _K =10mA, T _A =25°C	0.5% tolerance	2.487	2.500	2.513	V
			1% tolerance	2.475		2.525	
Reference Voltage Deviation over Full Temperature Range		I _K =10mA, T _A =-40 to 105°C			5	24	mV
Minimum Cathode Current for Regulation					0.1	1	mA
Dynamic Impedance		I _K =1.0 to 80mA, f<1kHz			0.2	0.5	Ω
Op Amp 1 Section (V _{CC} =5V, V _O =1.4V, T _A =25°C, unless otherwise noted)							
Input Offset Voltage		T _A =25°C			0.5	3	mV
		T _A =-40 to 105°C				5	
Input Offset Voltage Temperature Drift		T _A =-40 to 105°C			7		μV/°C
Input Bias Current (Inverting Input Only)		T _A =25°C			20	150	nA
Large Signal Voltage Gain		V _{CC} =15V, R _L =2KΩ, V _O =1.4 to 11.4V		85	100		dB
Power Supply Rejection Ratio		V _{CC} =5 to 18V		70	90		dB
Output Current	Source	V _{CC} =15V, V _{ID} =1V, V _O =2V		20	40		mA
	Sink	V _{CC} =15V, V _{ID} =-1V, V _O =2V		10	20		mA
Output Voltage Swing (High)		V _{CC} =18V, R _L =10KΩ, V _{ID} =1V		16	16.5		V
Output Voltage Swing (Low)		V _{CC} =18V, R _L =10KΩ, V _{ID} =-1V			17	100	mV
Slew Rate		V _{CC} =18V, R _L =2kΩ, A _V =1, V _{IN} =0.5 to 2V, C _L =100pF		0.2	0.5		V/μ s
Gain Bandwidth Product		V _{CC} =18V, R _L =2kΩ, C _L =100pF, V _{IN} =10mV, f=100kHz		0.7	1		MHz

**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****Electrical Characteristics (Continued)**Operating Conditions: $V_{CC}=+5V$, $T_A=25^{\circ}C$ unless otherwise specified.

Parameter	Conditions	Min	Typ	Max	Unit
Op Amp 2 Section ($V_{CC}=5V$, $V_O=1.4V$, $T_A=25^{\circ}C$, unless otherwise noted)					
Input Offset Voltage	$T_A=25^{\circ}C$		0.5	3	mV
	$T_A=-40$ to $105^{\circ}C$			5	
Input Offset Voltage Temperature Drift	$T_A=-40$ to $105^{\circ}C$		7		$\mu V/^{\circ}C$
Input Offset Current	$T_A=25^{\circ}C$		2	30	nA
Input Bias Current	$T_A=25^{\circ}C$		20	150	nA
Input Voltage Range	$V_{CC}=0$ to $18V$	0		$V_{CC}-1.5$	V
Common Mode Rejection Ratio	$T_A=25^{\circ}C$, $V_{CM}=0$ to $3.5V$	70	85		dB
Large Signal Voltage Gain	$V_{CC}=15V$, $R_L=2k\Omega$, $V_O=1.4$ to $11.4V$	85	100		dB
Power Supply Rejection Ratio	$V_{CC}=5$ to $18V$	70	90		dB
Output Current	Source $V_{CC}=15V$, $V_{ID}=1V$, $V_O=2V$	20	40		mA
	Sink $V_{CC}=15V$, $V_{ID}=-1V$, $V_O=2V$	10	20		mA
Output Voltage Swing (High)	$V_{CC}=18V$, $R_L=10k\Omega$, $V_{ID}=1V$	16	16.5		V
Output Voltage SWing (Low)	$V_{CC}=18V$, $R_L=10k\Omega$, $V_{ID}=-1V$		17	100	mV
Slew Rate	$V_{CC}=18V$, $R_L=2k\Omega$, $A_V=1$, $V_{IN}=0.5$ to $2V$, $C_L=100pF$	0.2	0.5		$V/\mu s$
Gain Bandwidth Product	$V_{CC}=18V$, $R_L=2k\Omega$, $C_L=100pF$, $V_{IN}=10mV$, $f=100kHz$	0.7	1		MHz

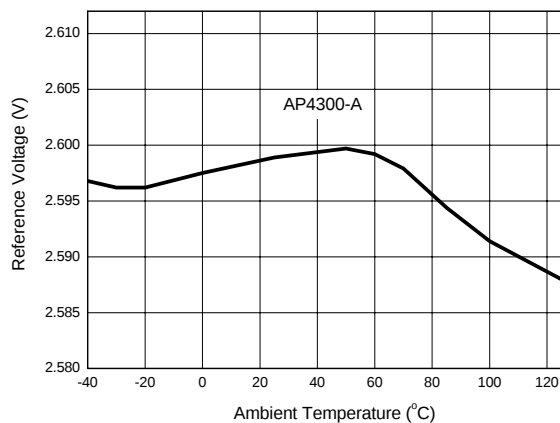
**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****Typical Performance Characteristics**

Figure 6. Reference Voltage vs. Ambient Temperature

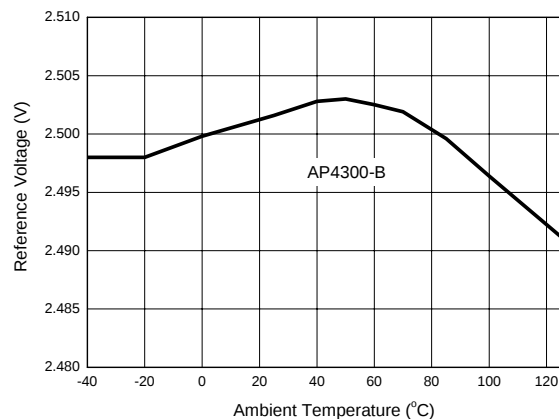


Figure 7. Reference Voltage vs. Ambient Temperature

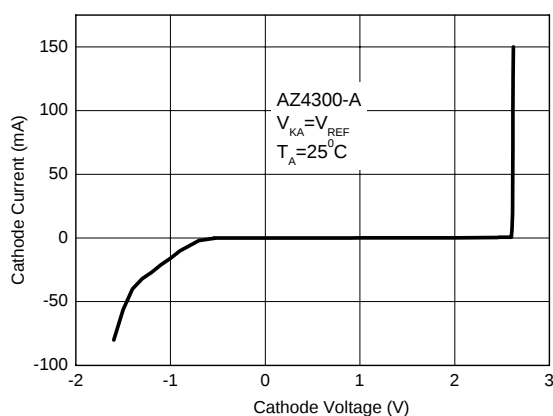


Figure 8. Cathode Current vs. Cathode Voltage

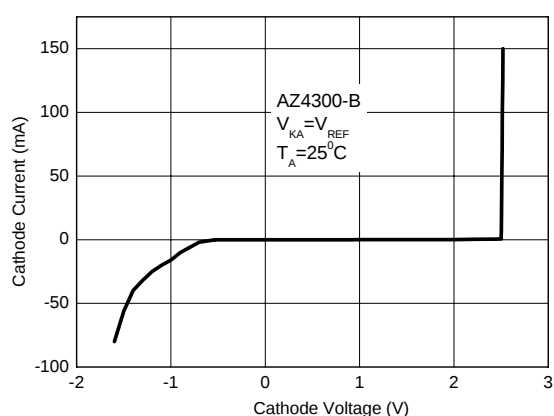


Figure 9. Cathode Current vs. Cathode Voltage

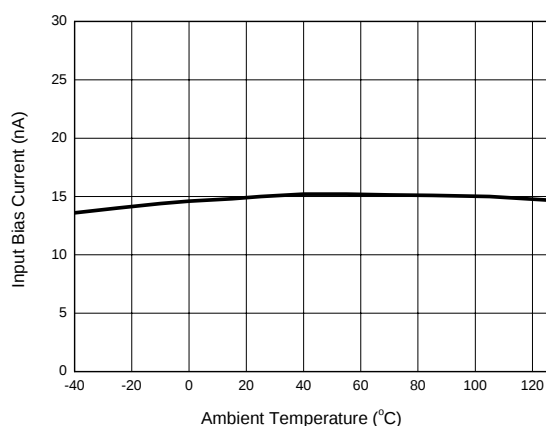


Figure 10. Input Bias Current vs. Ambient Temperature

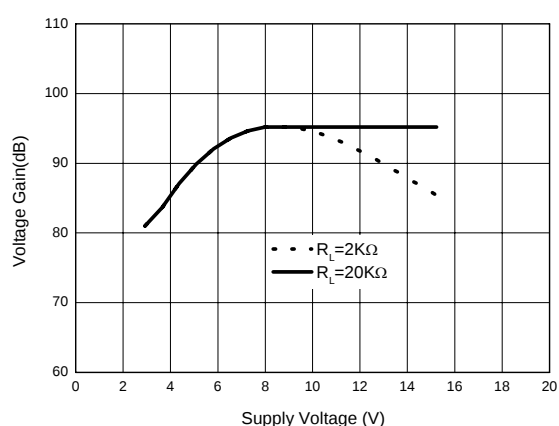


Figure 11. Operational Amplifier Voltage Gain


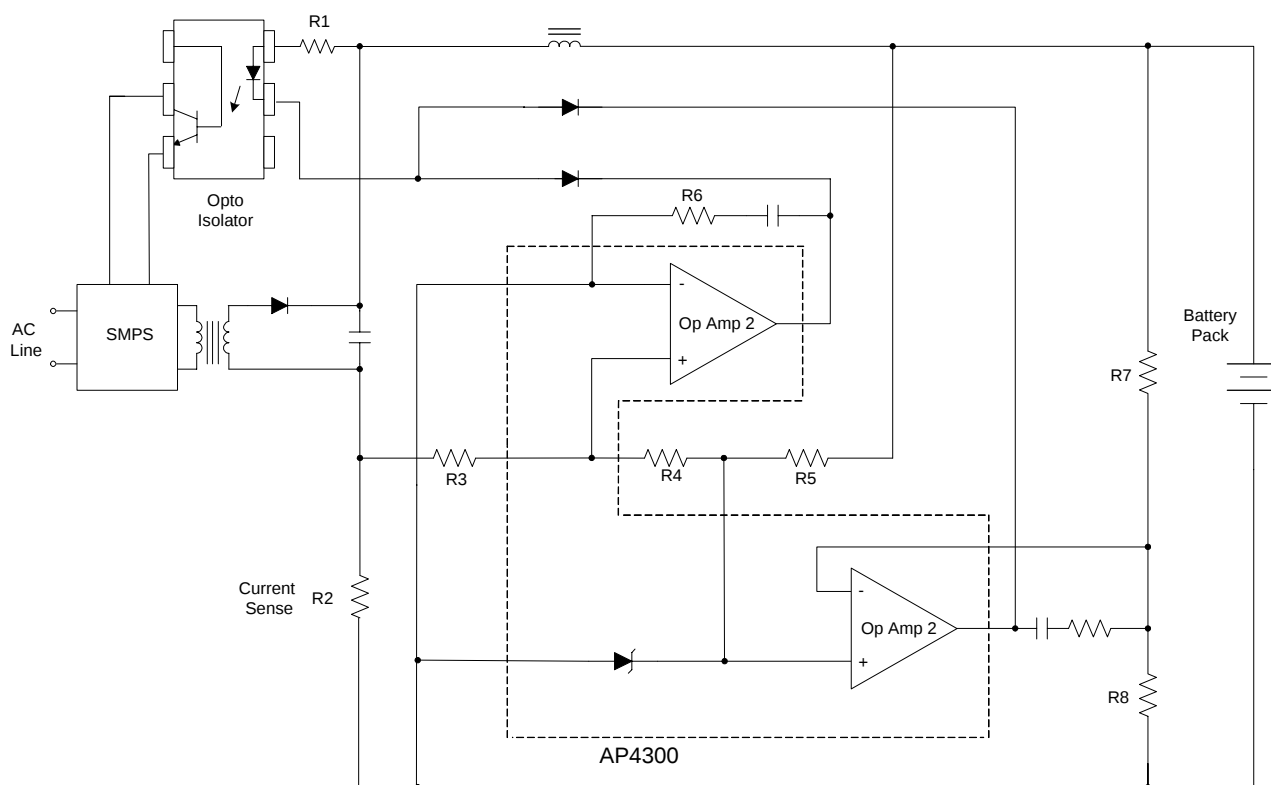
**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****Typical Application**

Figure 12. Application of AP4300 in a Constant Current and Constant Voltage Charger

**DUAL OP AMP AND VOLTAGE REFERENCE****AP4300****Mechanical Dimensions****DIP-8****Unit: mm(inch)**

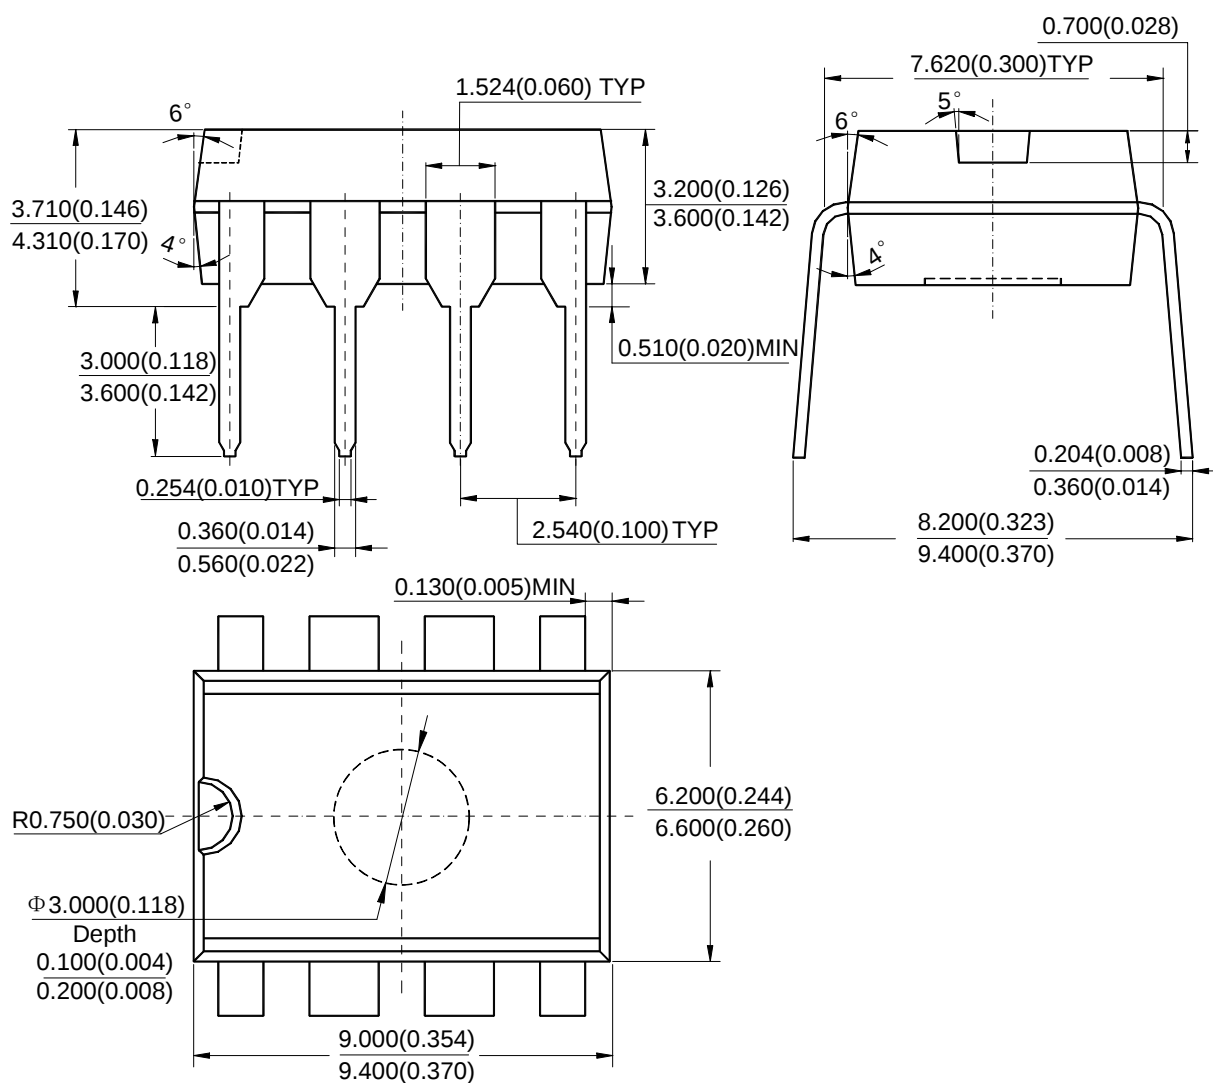

Mechanical Dimensions (Continued)

SOIC-8

Unit: mm(inch)

